




FRONT VIEW

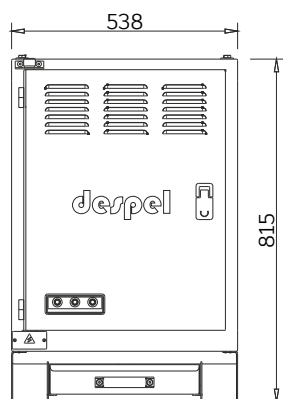

TOP VIEW

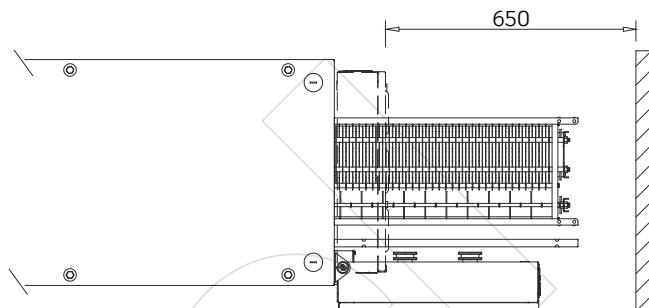

LEFT VIEW

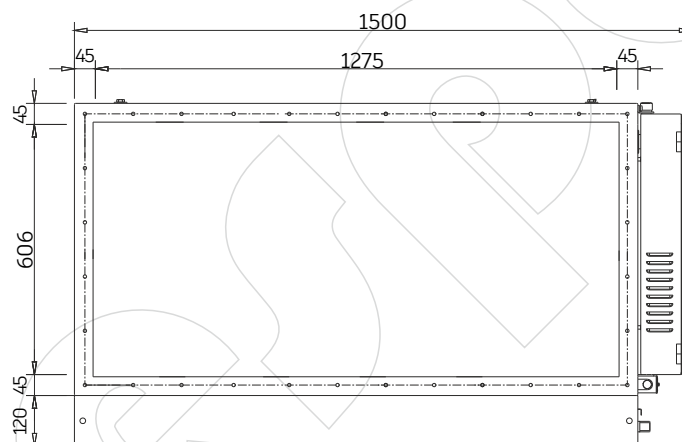

Air Volume	<b>10000 m<sup>3</sup>/h</b>
Efficiency	up to <b>%89</b> (From 0.01 microns - 10 microns)
Static Pressure	54 Pa
Power & Voltage	154 Watts 230 VAC +/-10% , 50/60Hz
Power Pack/ Cell Qty.	1/2
Ionising Voltages	High Voltage: 14KVdc, Low Voltage: 7KVdc
Installation	Ceiling Suspended; Wall or Frame Mounted
Dimensions	538×1500×815 mm (LxWxH)
Unit Weight	119 kg
Power Supply	High Frequency solid state and self regulating design
Pre-Filter	Aluminum Mesh
Primary Filter	Standard Forever Filter - Electronic Ionizer / Collector Cell
After Filter	Optional Disposable Charcoal After Filter
Controls	On/Off Switch with Indicating Light
General	Multiple Units Can be Joined Together for Increased

**Standart Specifications for Each Unit**

Cabinet	1,4mm (16 Gauged) Welded Galvanized Steel
Finish	Red or Blue Epoxy Powder Coat
Air Flow	Horizontal - Standart Right to Left (Optionally Left to Right)
Accessories	Optional Brass Drain Fitting, Optional Source Capture Plenum