



RIGHT VIEW

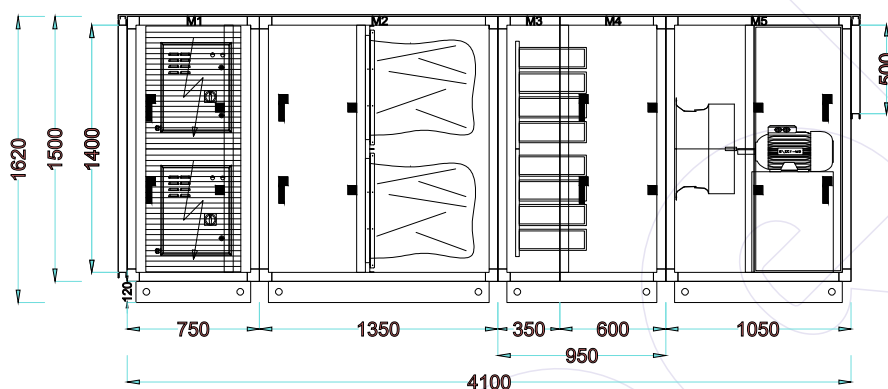

TOP VIEW

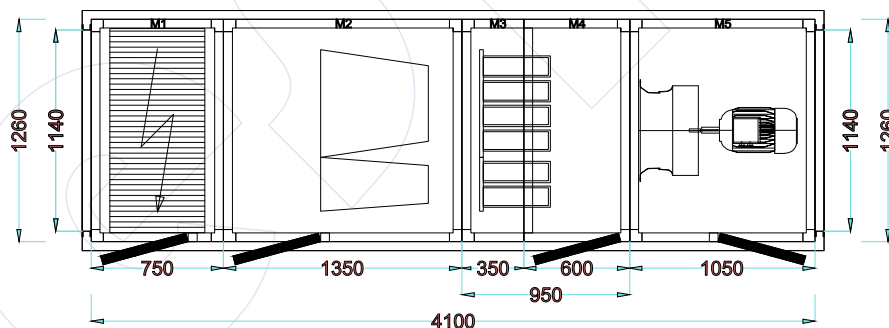

GENERAL SPECIFICATIONS

Airflow
10000 m³/h

Air Velocity
1,71 m/s

Fan Model
RLM E6-5663

Filter 1
Electrostatic Filter

Filter 2
Bag Filter

Filter 3
Activated Carbon Filter

Model / Frame
50x50 mm

Insulation Material
50 mm Rockwool 70 kg/m³

Outside Sheet Material
0,8 mm Painted Galvanize

Inside Sheet Material
1 mm Galvanize

Dimensions (mm) (Size+Pedestal)
W 1260 x H 1620 x L 4100

Total Weight
1278 kg

Base Height
120 mm

Motor Power
5,5 kW

Total Absorbed Power
4,96 kW

Specific Fan Power (SFP Total)
122,7 W/(m³/s)


ErP Code
NRVU-UVU

fs-Pref (W-S)
0,89

External Static Pressure
500 Pa

FILTER (M1)

Model	Electrostatic Filter	Section weight	330 kg
Section length	750 mm	Pass type	Single Pass
Max. Air flow rate	12000 m ³ /h (6000 x 2)	Efficiency	95% single pass DOP Test 96% single pass ASHRAE 52.2-2012
Design pressure drop	50 Pa	Drain	From 0.01 microns - 10 microns 1 1/2"
Case x qty.	DE60 x 2	Features	Short circuit, arc protection and auto restore PS. BMS terminals provided Auto power cut-off when door is opened Indicator LEDs for normal or wash indicator Set of Terminals for remote LED
Type	Plate - Cell		
Total cell qty.	4		
Pre-filter	Metalic Cassette Filter		
Total power	308 W		
Voltage	1 ph / 220-240 V / 50Hz		
Ionising voltages	High Voltage: 12KVdc, Low Voltage: 6KVdc		




FILTER (M2)

Model	Bag Filter	Section weight	243 kg
Section length	1350 mm	Efficiency class EN779	F7
Max. Air flow rate	24000 m ³ /h	Filter frame	Galvanised steel
Design pressure drop	219 Pa	Media type	Meltblown synthetic media
		Max. Operating Temp.	93 °C
		Air velocity	2,67 m/s
		Size / qty.	2 pcs. 592x592x610mm 2 pcs. 592x287x610mm





FILTER (M3/M4)

Model	Activated Carbon	Section weight	366 kg
Section length	950 mm	Carbon type	Granule AC - 4 mm pellet
Max. Air flow rate	10320 m ³ /h	Carbon weight	~3,5 kg per cartridge
Design pressure drop	272 Pa	Max. Relative humidity	70%
Case type	Cylindrical Cartridge	Eff. Work. Max. Temp.	40°C
Case material	Painted Galvanized Steel	Iodine	900 mg/g (AWWA B 600-78)
Gasket	Epdm	Specific surface area	1000 m ² /g
Cartridge dimensions	Ø145 x 600 mm	Density	550 kg/m ³ (ASTM D 2854)
Total cartridge qty.	48 pcs	CCI adsorption	50% (ASTM D3467)
Total carbon weight	168 kg		



EXHAUST FAN (M5)

Air Flow	Motor Type	Fan Model	Quantity
10000 m ³ /h	AC-GM 132 S-4	Nicotra-Gebhardt-RLM E6-5663-43-19-A	1
Internal Static Pressure	Motor Po./Pha./Volt./Freq.	Power Margin	Section Length
551 Pa	5,5 kW/3P/380V/50V-Hz	1,01 %	1050 mm
External Static Pressure	Motor Speed	Section Weight	
500 Pa	1500 (1430) rpm	338 kg	
Total Static Pressure	Fan Bush Number		
1051 Pa	2012		
Total Pressure	Motor Shaft Diameter		
1081 Pa	Ø38 mm		
Total / Static Efficiency			
76,00 / 74,00 %			
Motor / Invertor Efficiency			
86,20 / 97,00 %			
Shaft Power / Absorbed Power	Absorbed Power With VFD		
3,96 / 4,59 kW	4,73 kW		
Fan Speed	Running Frequency		
1460 rpm (Max. 1480 rpm)	51,05 Hz (Max. 51,75 Hz)		
	Air Density		
	1,2 kg/m ³		
Specific Fan Power (SFPe int)	Electrical Current		
122,7 W/(m ³ /s)	7,19 A (Max. 9,99 A)		

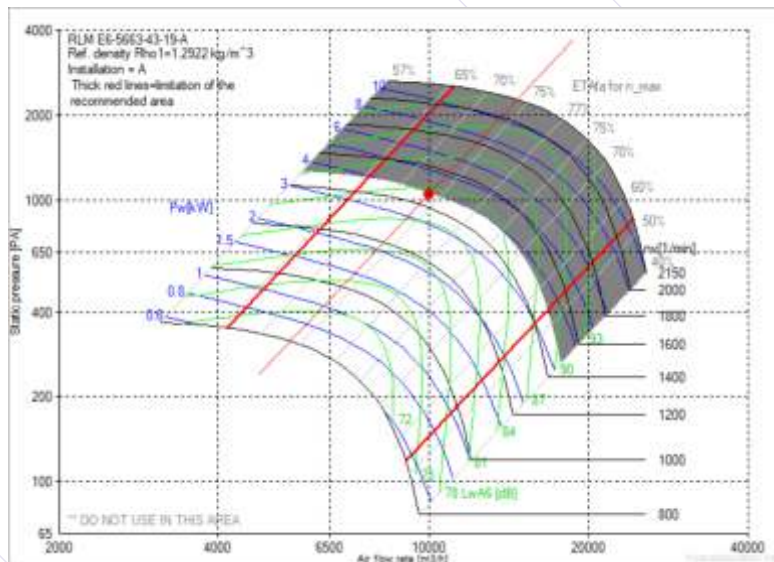

Exhaust Fan Sound Power Level (dB)

Hz	63	125	250	500	1000	2000	4000	8000	LwA-tot	
Outlet Side	78,0	87,0	81,0	78,0	78,0	76,0	71,0	66,0	83,0	dBA
Inlet Side	75,0	85,0	80,0	76,0	73,0	70,0	68,0	62,0	79,0	dBA

*The fan system effect is taken into account in the fan performance
*The fan calculated for wet conditions

CONTROL BOARD

HMI Touch Screen (Room)
7" HMI Box
Variable Frequency Drive (VFD)
5,5 kW
Main Controller (PLC)
Yes

Standard Specificaitons

- BMS integration (Modbus RTU, Modbus TCP/IP, BACnet IP)
- Variable fan speed control
- Electrostatic Filter/Bag dirtiness info
- Activated carbon filter integrity monitor (Time Counter)
- Door switch info
- Adaptation to fire safety system / fire mode
- Air volume set, monitoring and control from the room HMI Box
- Detailed daily and weekly time scheduling



SOUND POWER LEVEL (dB)

Frequency Hz	125	250	500	1000	2000	4000	8000	LwA-tot	
Airborne Sound Power Level	68,0	54,0	47,0	44,0	42,0	34,0	24,0	54,5	dBa
Air Outlet Induct Sound Power Level	87,0	81,0	78,0	78,0	76,0	71,0	66,0	83,0	dBa
Air Inlet Induct Sound Power Level	66,0	61,0	57,0	54,0	55,0	53,0	47,0	62,0	dBa

CASING ACOUSTICAL INSULATION [dB]

Frequency Hz	125	250	500	1000	2000	4000	8000	
	19,0	27,0	31,0	34,0	34,0	37,0	42,0	dBa

AIR CONNECTIONS



Airflow

10000 m³/h

Air Velocity

1,74 m/s

Dimensions

W 1140 mm x H 1400 mm

Connection Type

Flange

Pressure Drop

0 Pa

Control

No

Airflow

10000 m³/h

Air Velocity

4,87 m/s

Dimensions

W 1140 mm x H 500 mm

Connection Type

Flange

Pressure Drop

10 Pa

Control

No

OPTIONS (non-standard)

- Electric motor out of air stream
- Special control scenarios on request
- Temperature or VOC control
- Motorized damper for inlet/outlet connections
- Damper modulation of ecology unit
- Fire damper
- Rain louver
- Bulkhead light
- IOT Module (4G or Ethernet)
- Silencer unit